

## Hengeres fejű átedzett kilőkő, lemunkált szárral DIN ISO 8694 (DIN 1530, Form CH szerint)

**Cikkszám:** KL9

**Anyag:** WS 1.2210, 1.2067 vagy hasonló

**Keménység:** szár 60+2 HRC


fej 45+5 HRC

**Lépcső:** 0,1 mm ( $d_1$ )

**Rendelési példa:**

hengeres fejű átedzett kilőkő lemunkált szárral,  
 átmérő  $d_1=2$  mm, szárátméző  $d_2=3$  mm, teljes hossz  $l_1=125$  mm

**Cikkszám:** KL9-2/3x125

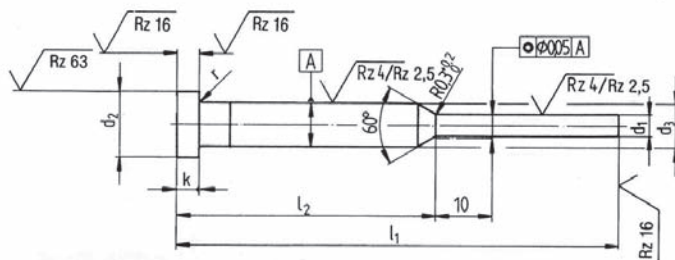

$d_1$	$d_2$	$d_3$	k	r	$l_1$												
					63	80	100	125	160	200	250	315					
					$l_2$												
g 6	0	h11	0	+ 0.2													
lépcső: 0,1 mm	- 0.2		- 0.05	0	25	32	50	50	63	80	100	160					
0,5	4	2	2	0,2		●	●	●	●								
0,6 és 0,7						●	●	●	●	●							
0,8					●	●	●	●	●	●	●						
0,9					●	●	●	●	●	●	●						
0,85 és 0,95												●	●				
1,0					●	●	●	●	●	●	●			●			
1,1																	
1,2	●	●	●	●	●	●	●	●	●	●							
1,3 és 1,4																	
1,5	6	3	3	0,3		●	●	●	●	●	●	●	●				
1,6						●	●	●	●	●	●	●	●				
1,7 - 1,9						●	●	●	●	●	●						
2,0						●	●	●	●	●	●	●	●	●	●		
2,1 és 2,2						●	●	●	●	●	●	●	●				
2,3 és 2,4						●	●	●	●	●	●	●	●				
2,5										●	●	●	●	●	●	●	