


Hengeres fejű kilőkő gyorsacélból DIN ISO 6751

Cikkszám: KL5
Anyag: HSS
ASP 23, ill. CPM 10V anyagból is szállítható

Keménység: szár 62+2 HRC
fej 50+5 HRC

Rendelési példa:
hengeres fejű kilőkő gyorsacélból,
átmenő szárral,
száratmérő $d_1 = 4$ mm
teljes hossz $l_1 = 125$ mm
Cikkszám: KL5-4x125

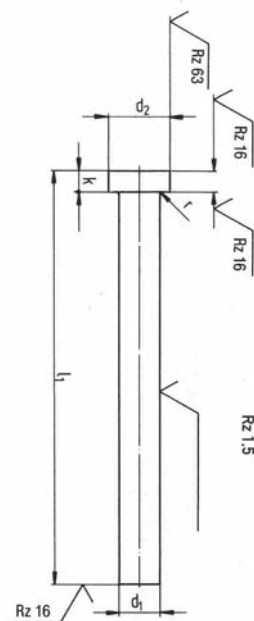

d_1	d_2	k	r	l_1									
				+ 2 0									
g 6	0 - 0,2	0 - 0,05	+ 0,2 0	100	125	160	200	250	315	400	500	630	
1,2	2,5	1,2	0,2			●							
1,5	3	1,5		●	●	●	●						
2	4	2,0		●	●	●	●	●	●				
2,2				●	●	●	●						
2,5	5	3	0,3	●	●	●	●	●					
3	6			●	●	●	●	●	●		●		
3,2				●	●	●	●	●					
3,5	7			●	●	●	●	●	●				
4	8			●	●	●	●	●	●	●	●		
4,2				●	●	●	●	●					
4,5				●	●	●	●	●	●				
5	10			●	●	●	●	●	●	●	●		●
5,2													
5,5													
5,6													
6	12	5	0,5				●	●	●			●	
6,5													
7												●	
8												●	
8,5				14									
9													
9,5	●												
9,5	16												
10		●	●	●	●	●	●	●	●	●	●		
11													
12		18	●		●	●	●	●	●	●			
14	22	7	0,8								●		
15													
16													
17													