


Késes kilőkő, nitridált

DIN ISO 8693 (DIN 1530, Form FA szerint)

Cikkszám: KL11
Anyag: hőálló acél
Keménység:
 szár felületen min. 950 HV 0,3
 magzilárdság kb. 1400N/mm²
 fej 45±5 HRC

Rendelési példa:
 hengeres fejű nitridált kilőkő
 nitridált-oxidált kivitelben,
 szárátmérő $d_3 = 8$ mm
 $a = 2$ mm, $b = 7,5$ mm
 teljes hossz $l_1 = 200$ mm
Cikkszám: KL11-2x7,5x8x200

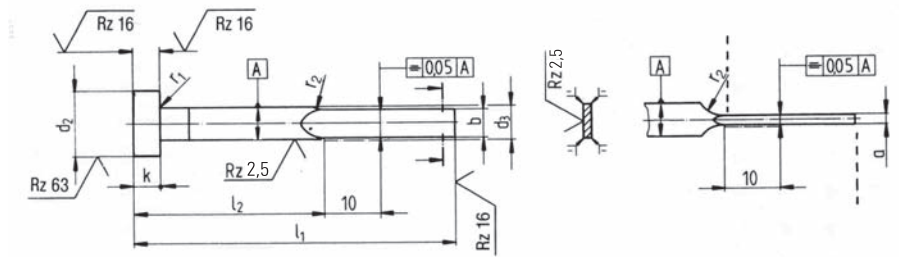

a	b	d_3	d_2	k	r_1	r_2	$l_1 + 2/0$										
							63	80	100	125	160	200	250	315	400		
0	0	h11	0	0	0,2	min	$l_4 - 1/- 2$										
-0,015	-0,015		-0,2	-0,05	0		32	40	50	63	80	100	125	160	200		
0,8	3,5	4	8	3	0,3	10	●	●	●	●							
1,0							●	●	●	●							
1,2							●	●	●	●	●	●					
1,0							●	●	●	●	●						
0,8	3,8	4,2					●	●	●	●	●						
1,0							●	●	●	●	●						
1,2							●	●	●	●	●						
1,5							●	●	●	●	●						
1,0	4,5	5	10				●	●	●	●	●						
1,2							●	●	●	●	●						
1,5							●	●	●	●	●						
2,0							●	●	●	●	●						
1,2	5,5	6	12				●	●	●	●	●						
1,5							●	●	●	●	●						
2,0							●	●	●	●	●						
1,2							●	●	●	●	●						
1,5	7,5	8	14	5	0,5	●	●	●	●	●							
2,0						●	●	●	●	●							
1,2						●	●	●	●	●							
1,5						●	●	●	●	●							
2,0	9,5	10	16			●	●	●	●	●	●						
1,5						●	●	●	●	●							
2,0						●	●	●	●	●							
2,0						●	●	●	●	●							
2,0	11,5	12	18			●	●	●	●	●	●	●					
2,5						●	●	●	●	●							
2,0						●	●	●	●	●							
2,5						●	●	●	●	●							
2,0	15,5	16	22			●	●	●	●	●	●	●	●				
2,5						●	●	●	●	●	●	●	●	●	●		