

Késes kilőkő, nitridált

DIN ISO 8693 (DIN 1530, Form FA) szerint

Cikkszám: **KL11**

Anyag: hőálló acél

Keménység:

szár felületen min. 950 HV 0,3

magszilárdság kb. 1400 N/mm²


fej 45 +10/-5 HRC

Rendelési példa:

hengeres fejű nitridált kilőkő

nitridált-oxidált kivitelben,

Cikkszám: KL11 – a × b × d₃ × l₁

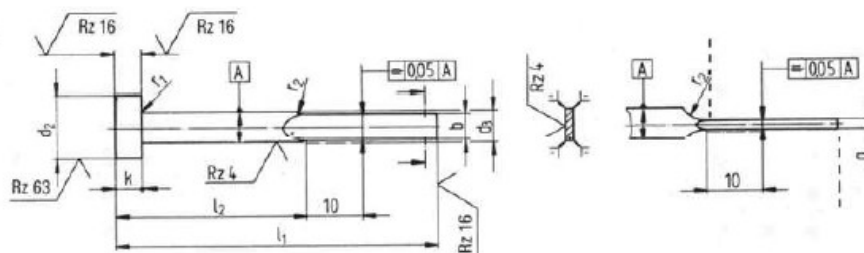

a 0 -0,015	b 0 -0,015	d ₃ h11	d ₂ 0 -0,2	k 0 -0,05	r ₁ +0,2 0	r ₂ min	l ₁ +2 / 0										
							63	80	100	125	160	200	250	315	400		
							l ₂ -1 / -2										
							32	40	50	60	80	100	125	160	200		
0,8	3,5	4	8	3	0,3	10	•	•	•	•	•						
1,0							•	•									
1,0		4,2						•	•	•							
1,2		4						•									
0,8	3,8	4,2	5				0,5		•	•	•	•	•				
1,0									•	•	•	•	•				
1,2									•	•	•	•	•	•			
0,8	4,5	5						10				•					
1,0										•	•	•	•	•			
1,2										•	•	•	•	•			
1,5										•	•	•	•	•	•		
0,8	5,5	6		12						•	•						
1,0								•	•	•	•	•	•	•			
1,2								•	•	•	•	•	•				
1,5									•	•	•		•				
2,0							•	•	•								
1,2	7,5	8	14	7	0,8				•	•	•	•	•	•			
1,5									•	•	•	•	•				
1,6										•							
2,0										•	•	•	•	•	•		
1,5	9,5	10	16							•	•	•	•	•	•		
2,0										•	•	•	•	•	•		
2,0											•	•	•	•	•		
2,0	11,5	12	18								•	•	•	•	•		
2,5											•	•	•	•	•		
2,0	15,5	16	22									•	•	•	•		
2,5											•	•	•	•	•		