

Csőkilőkő, átedzett


DIN ISO 8405 (DIN 16756) szerint

Cikkszám: **KL15**

Anyag: WS

Keménység: szár 60 ±2 HRC
fej 45 +10/-5 HRC

Rendelési példa:
csőkilőkő átedzett kivitelben,
Cikkszám: KL15 – d₁ × d₃ × l₁

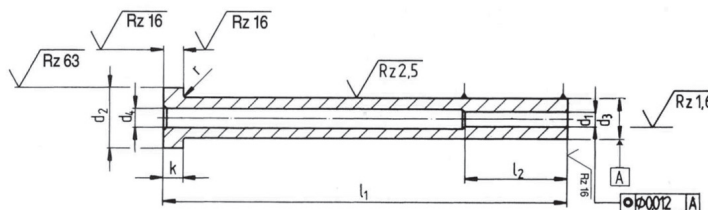

d ₁ H5	d ₃ g6	d ₄ 0 -0,1	d ₂ 0 -0,2	k 0 -0,05	r ₁ +0,2 0	l ₂ +2 0	l ₁ +1 0																		
							50	60	75	100	125	150	175	200	225	250	275	300	325	400					
1,5	3	1,8	6	3	0,3	35	•	•	•	•	•	•													
1,6		2					•	•	•	•	•														
1,6	4	2,5	8																						
1,8		2,1																							
1,9	3	2,2	6																						
2,0		2,2																							
2,2	4	2,5	8																						
2,5		2,8																							
2,5	5	3	10																						
2,7																									
3,0	6	3,5	12	5	0,5	45	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
3,0				3																					
3,2	5	3,8	10	3																					
3,5																									
3,5	6	4	12	5	0,5																				
3,7																									
4,0	5,5	4,5	10	3																					
4,0	6																								
4,0	6,2																								
4,0	8																								
4,2	6																								
4,2	8																								
4,5	6	4,8	12	5		0,5																			
4,5	7	5																							
4,5	8																								
5,0	7																								
5,0	8	5,5	14																						
5,2																									
5,5	9	5,8	14																						
6,0																									
6,0	10	6,5	16																						
6,2																									
6,5		7																							
7,0		7,5																							
8,0	11	8,5	20																						
8,0	12																								
8,2				9																					
8,5				9,3																					
9,0	14	10,5	22																						
10,0																									
10,2		11																							
10,5		11,5																							
11,0	16	12,5	26																						
12,0		13																							
12,5	20	16,5	26																						
16,0						1	50																		