

Vezetőpersely karimával, önkenő bevonattal

Cikkszám: R-B5A


Alapanyag: 1.7131 edzett acél

fluorkarbon bevonattal

súrlódási együttható: 0,06

Keménység: 61-63 HRC

ISO 9448-4

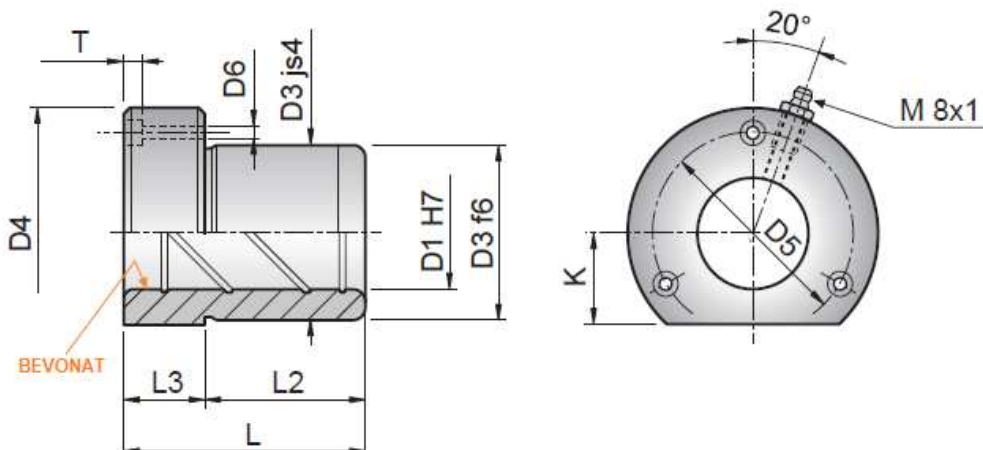

R-B5A-1								
Cikkszám	D1	D3	D4	D5	K	L2	L	T
R-B5A-1 19x52	19	32	50	40	18	37	52	4,6
R-B5A-1 20x52	20	32	50	40	18	37	52	4,6
R-B5A-1 24x62	24	40	63	50	23	37	62	5,7
R-B5A-1 25x62	25	40	63	50	23	37	62	5,7
R-B5A-1 30x72	30	48	72	58	28	47	72	5,7
R-B5A-1 32x72	32	48	72	58	28	47	72	5,7
R-B5A-1 38x77	38	58	85	70	33	47	77	6,8
R-B5A-1 40x77	40	58	85	70	33	47	77	6,8
R-B5A-1 48x102	48	70	104	86	38	60	102	9
R-B5A-1 50x102	50	70	104	86	38	60	102	9
R-B5A-1 60x102	60	85	120	100	46	60	102	9
R-B5A-1 63x102	63	85	120	100	46	60	102	9
R-B5A-1 80x125	80	105	148	125	56	75	125	11

R-B5A-2								
Cikkszám	D1	D3	D4	D5	K	L2	L	T
R-B5A-2 19x45	19	32	50	40	18	30	45	4,6
R-B5A-2 20x45	20	32	50	40	18	30	45	4,6
R-B5A-2 24x55	24	40	63	50	23	30	55	5,7
R-B5A-2 25x55	25	40	63	50	23	30	55	5,7
R-B5A-2 30x62	30	48	72	58	28	37	62	5,7
R-B5A-2 32x62	32	48	72	58	28	37	62	5,7
R-B5A-2 38x67	38	58	85	70	33	37	67	6,8
R-B5A-2 40x67	40	58	85	70	33	37	67	6,8
R-B5A-2 48x89	48	70	104	86	38	47	89	9
R-B5A-2 50x89	50	70	104	86	38	47	89	9
R-B5A-2 60x89	60	85	120	100	46	47	89	9
R-B5A-2 63x89	63	85	120	100	46	47	89	9

R-B5A-4								
Cikkszám	D1	D3	D4	D5	K	L2	L	T
R-B5A-4 19x38	19	32	50	40	18	23	38	4,6
R-B5A-4 20x38	20	32	50	40	18	23	38	4,6
R-B5A-4 24x38	24	40	63	50	23	23	38	5,7
R-B5A-4 25x38	25	40	63	50	23	23	38	5,7
R-B5A-4 30x45	30	48	72	58	28	30	45	5,7
R-B5A-4 32x45	32	48	72	58	28	30	45	5,7
R-B5A-4 38x55	38	58	85	70	33	30	55	6,8
R-B5A-4 40x55	40	58	85	70	33	30	55	6,8
R-B5A-4 48x62	48	70	104	86	38	37	62	9
R-B5A-4 50x62	50	70	104	86	38	37	62	9
R-B5A-4 15x36	15	28	45	35	15	30	36	3,4
R-B5A-4 15x29	15	28	45	35	15	23	29	3,4
R-B5A-4 16x36	16	28	45	35	15	30	36	3,4
R-B5A-4 16x29	16	28	45	35	15	23	29	3,4